

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
9 October 2003 (09.10.2003)


PCT

(10) International Publication Number
WO 03/083996 A1

- (51) International Patent Classification⁷: **H01R 4/24**
- (21) International Application Number: **PCT/GB03/00960**
- (22) International Filing Date: **7 March 2003 (07.03.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
0207482.1 28 March 2002 (28.03.2002) GB
- (71) Applicant (for all designated States except US):
WHEELER & CLINCH LIMITED [GB/GB]; 75-99
Nathan Way, West Thamesmead Business Park, London
SE28 0BQ (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WHITE, Rowland**
[GB/GB]; Highfields, Farnham, Blandford Forum, Dorset
DT11 8DD (GB).
- (74) Agent: **FORRESTER KETLEY & CO**; Forrester House,
52 Bounds Green Road, London N11 2EY (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A CONTACT

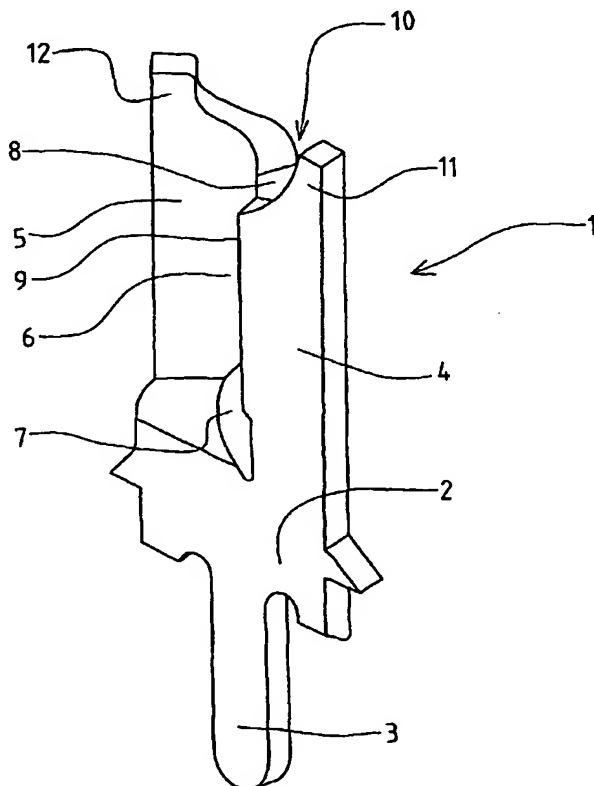

(57) Abstract: A contact for establishing electrical connection with an electrically conductive wire, the contact being manufactured from a planar material and having a base and a pair of elongate blades extending from the base and defining there between a channel within which a wire is to be received, a flat contact surface of one blade and a cutting edge of the other blade lying on opposite sides of the channel, the flat contact surface maintaining the wire substantially parallel to the flat contact surface through the channel.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

“A Contact”

THE PRESENT INVENTION relates to a contact, and in particular to a contact of an insulation displacement connector.

A contact of an insulation displacement connector removes or pierces an insulating covering of an insulated wire during connection of the wire to the connector and makes electrical contact with the electrical conductor within the insulating covering. Such contacts and connectors are well known in the telecommunications industry. Insulation displacement connectors allow the swift connection of a wire to a device, without the need for preparation of the wire by removal of the insulating covering prior to insertion in the connector.

Conventionally, the contacts of an insulation displacement connector comprise a pair of cutting members or tines having opposed cutting edges. A wire to be connected to the contact is pushed between the cutting edges. The distance between the cutting edges is calibrated to be approximately equal to or slightly less than the diameter of the conductive core of the wire, so that the action of pushing the wire between the cutting edges causes the cutting edges to slice through the insulating covering of the wire, removing the insulating covering and contacting the cutting edges with the conductive core thereby establishing electrical connection. Usually a plurality of such cutting members (the same number as wires to be connected) are held in a housing block of the insulation displacement connector.

Most current insulation displacement connectors are designed for use with standard telephone cable. However, relatively recent developments in

technology have rendered standard telephone cable increasingly obsolete, and higher speed transmission cables are becoming increasingly common. One of the most significant changes to have occurred in cable design relates to the characteristics of the material used to form the insulating covering of individual wires. Whereas standard telephone cable employs an insulating covering comprising a relatively soft PVC material, many different materials are used to insulate modern cables to enhance the performance thereof, and many of the different materials are significantly more difficult to penetrate and cut than the conventional soft PVC material.

Hence, many conventional insulation displacement connectors are inadequate for use with modern cables, and may require excessive force to insert a cable, or may often fail to make successful connections with cables.

Typically, as illustrated in Figure 1 of the accompanying drawings, an insulation displacement connector includes a contact comprising a sheet of material from which a slot has been cut out. As described above, the width of the slot is calibrated to be approximately equal to or slightly less than the diameter of the core of an insulated wire with which the contact is to be used. To establish an electrical connection, the wire is forced through the slot, so that the inner edges thereof cut through the insulating covering of the wire leaving the conductive core thereof exposed and in contact with the inner edges .

One method of improving the cutting properties of a contact of this type is to rotate the sheet of material from which the contact is formed through around 45° with respect to the longitudinal axis of a wire (the wire-axis) to be inserted therein.

Further, it is generally accepted that arranging a planar contact at approximately 45 degrees to the wire axis gives more reliable two-wire connection than where the contact blades are at right angles to the wire axis. This is principally because, when the contact is at about a 45 degree angle, the displacement of the contact blades is torsional, and thus there is always a residual spring force in the wire contact area, this force being capable of contacting a second wire introduced into the same slot. In the case of planar blades at right angles to the wire, the blade displacement is by a shearing force, which is less likely to result in residual spring force at the contact area, and hence contact for a second wire is seriously compromised.

Unfortunately, contacts which operate at about 45 degrees to the wire axis exert a residual torsional force on the wire, tending to turn the wire towards 90 degrees with the contact blades. This is corrected by the use of "clamping elements" as disclosed in US 4,171,857 in the connector body, see Figure 1 of the accompanying drawings, which are intended to maintain the wire securely in the correct axis. Of course, these always rely on the ability of one type of plastics material to firmly retain a grip on a second type of plastics material, which may not always be reliable.

The only way to overcome this residual force with a planar contact has been to arrange the contact at 90 degrees to the wire axis, and in this situation, as mentioned above, the contact is unreliable with two wires connected, as the shearing force displacement of the blades leaves no residual force available to contact the second wire in the same slot. This can be overcome by the introduction of a second slot - one slot for each wire - but the resulting contact is much wider, and hence connection density is around 30% to 50% less than with angled contacts.

There also exists in the prior art two contact designs in which the cutting blade displacement is torsional, but where no residual force is present at the contacts. These are the slotted tubular contact disclosed in US 4,591,223 (Vachhani) and the "V" contact disclosed in US 5,552,733 (White). In both of these contacts the blade displacement is torsional, but they retain the wire in the correct position without the need for the clamping elements disclosed in US 4,171,857.

However, these two contacts also have drawbacks: firstly they use more material than a planar contact, and they are more complex in manufacture, requiring part-stamping, folding or rolling operations, which are secondary stations in the manufacturing tooling. Furthermore, and by the nature of their designs, they create notches on diametrically opposing sides of the wire conductor, which can lead to premature mechanical failure at this point. This is a known weakness of these concepts.

Therefore, it is an object of the new design to provide an essentially planar contact, which may be mounted at an angle to the conductor, which does not apply residual torsional force to the wire, and which does not create notches at points which are diametrically opposite one another across the conductor.

Accordingly, one aspect of the present invention provides a contact for establishing electrical connection with an electrically conductive wire, the contact being manufactured from a planar material and having a base and a pair of elongate blades extending from the base and defining therebetween a channel within which a wire is to be received, a flat contact surface of one blade being opposite a cutting edge of the other blade and lying on opposite sides of the channel, the flat contact surface maintaining the wire substantially parallel to the flat contact surface through the channel.

Preferably, one blade is shaped so as to present the flat contact surface to the cutting edge of the other blade.

Conveniently, the shaped blade prescribes an arc about an axis parallel to the longitudinal axis of the shaped blade.

Advantageously, the blades each have two major surfaces and two minor surfaces and the flat contact surface comprises a minor surface of one blade proximate the other blade.

Preferably, the blades each have two major surfaces and two minor surfaces and the flat contact surface comprises a portion of a major surface of one blade proximate the other blade.

Conveniently, the blades each have two major surfaces and two minor surfaces and the cutting edge comprises a corner of a major surface with a minor surface of the other blade proximate the one blade.

Advantageously, the flat contact surface lies in a first plane and the planes of the two surfaces defining the cutting edge lie in a second and a third plane respectively, the second and third planes being respectively between 30° and 60° to the first plane.

Preferably, the second and third planes are in the region of 45° to the first plane.

Another aspect of the present invention provides a contact for establishing electrical connection with an electrically conductive wire, the contact being

manufactured from a planar material and having a base and a pair of elongate blades extending from the base and defining therebetween a channel within which a wire is to be received, a flat contact surface of one blade and a cutting edge of the other blade lying on opposite sides of the channel, wherein a line drawn parallel to the flat contact surface and passing through the point defined by the end of the cutting edge is not parallel to either of the surfaces defining the cutting edge.

Preferably, an insulation displacement connector includes one or more contacts embodying the present invention.

In order that the present invention may be more readily understood, embodiments thereof will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a plan view of a conventional insulation displacement connector incorporating clamping elements;

Figure 2 is a perspective view of a contact embodying the present invention;

Figure 3 is a schematic plan view of the blades only of the contact of Figure 2;

Figures 4 to 7 are schematic plan views of the blades only of further contact embodying the present invention; and

Figure 8 is a schematic plan view of one end of an insulation displacement connector fitted with contacts embodying the present invention.

Turning firstly to Figure 2, a contact 1 embodying the present invention is manufactured from a planar material and comprises a planar base 2 having an integrally formed terminal 3 depending therefrom. The base 2 and the terminal 3 are coplanar.

At the opposite end of the base 2 from the terminal 3, a first and a second elongate blade 4,5 are provided. The blades 4,5 extend away from the base 2 in the opposite direction to the terminal 3. The base 2, terminal 3 and blades 4,5 are formed from a single sheet of material, which is preferably brass or any other material having suitable properties.

As shown in Figures 2 and 3, the first blade 4 is coplanar with the base 2 and the terminal 3, but the second blade 5 is shaped with respect to the base 2 such that it prescribes an arc radiussed about an axis substantially parallel to the longitudinal axes of the blades 4,5. The type, location and extent of the radius can be varied as shown by the different arcs used in Figures 3 to 7.

A narrow channel 6 is formed between the blades 4,5. Where the channel 6 meets the base 2, the channel 6 widens out into a cut-out portion 7. Over the length of the channel 6, the blade edges 8,9 which define the channel 6 are parallel to one another. The mouth 10 to the channel 6 defined by the free ends 11,12 of the blades 4,5 provides a narrowing entrance between the blades 4,5 to guide a wire to be inserted between the blades 4,5 into the channel 6.

Turning to Figures 3 to 7, these figures are schematic plan views of the blades 4,5 only of contacts 1 embodying the present invention from which the relative orientations of the two blades 4,5 can be clearly seen.

The relative orientation between the blades 4,5 is now described in further detail. Referring to Figure 3, each blade 4,5 has two main surfaces 4A, 4B; 5A,5B and two minor surfaces 4C, 4D; 5C, 5D, the minor surfaces 4D, 5C being proximate one another. The channel 6 for receiving the or each wire is specifically defined by the gap between the minor surface 5C and a corner 13 of the proximate minor surface 4D with the major surface 4B. The corner 13 is opposite and "pointing" towards the flat minor surface 5C. In this manner, the two blades 4,5 of the contact 1 are arranged such that, at the point of contact with the wire, one blade 4 is substantially at 45 degrees to the wire axis W and the other blade 5 is substantially perpendicular to the wire axis W. This is very different to the cutting action of prior blade designs. This design uses one relatively sharp cutting edge, the corner 13, in conjunction with one relatively flat and wide contact face (the minor surface 5C in the examples of Figures 3 to 5 and a portion of the major surface 5A in the examples of Figures 6 and 7).

The cutting corner 13 of contacts 1 embodying the present invention easily cuts insulation around a conductor allowing the insulation to be readily stretched and pushed aside to allow contact between the stripped conductor and the flat wide contact face 5C,5A. This provides a larger contact area between the conductor and the contact than has previously been possible with conventional contacts which sandwich the conductor between two cutting corners. The larger contact area is extremely advantageous as it lowers the contact impedance. For high speed data circuits, low contact impedance is a critical design factor in datacomms connector technology.

Another important advantage of contacts 1 embodying the present invention is that, since the sharp cutting corner 13 aligns with substantially the centre of the flat contact face 5C,5A, these being at an angle in the region of 135 degrees to one another, although the force on the blades 4,5, themselves is torsional, there

is no residual twisting force on the wire inserted therebetween which means that the wire is stable at 45 degrees to the contact 1 and the connector body does not need to grip the wire so firmly. The major user advantages derived from this is that the wire orientation is stabilised without the need for clamping elements and a much wider range of insulation diameters can be accommodated in the contact without distorting or otherwise damaging the connector body. In the illustrated examples, the flat contact face 5C,5A lies in a first plane and the planes of the two surfaces 4D,4B defining the cutting corner 13 lie in a second and a third plane respectively, the second and third planes being respectively between 30° and 60° to the first plane. More preferably and as shown in Figure 3, the second and third planes are in the region of 45° to the first plane.

Referring now to Figure 8, one end of an insulation displacement connector 20 is shown housing two contacts 1 embodying the present invention. The connector 20 has equally spaced troughs 21 separated by walls 22. The troughs 21 are intended to receive insulated wires along their length, see wire axes W, and the walls 22 have cut-outs 24 at approximately 45 degrees to the troughs 21 and the wire axes W into which are housed the contacts 1. Thus, the contacts 1 are at approximately 45 degrees to the wire axes W. In this arrangement, the flat contact face 5C,5A of the blade 5 is substantially parallel to the wire axis W and the other blade 4 is at substantially 45 degrees to the wire axis W, thereby cutting the wire insulation with the cutting corner 13.

Figures 4 to 7 show other radiuses that can be applied to the blade 5 so that the channel 6 between the blades 4,5 is defined between a flat wide contact face 5C,5A and a cutting corner 13 of the respective blades 5,4. The important design feature in all of these examples is that the channel 6 in which a wire sits is bordered on one side by a flat surface 5C,5A of one blade 5 which maintains

the wire in a desired orientation with respect to the contact 1 and on the other side by a cutting corner 13 of the other blade 4.

In use of the contact 1, the plane of the base 2 is positioned at an angle of around 45° to the longitudinal axis W of a wire which is to be connected to the connector housing the contact 1. The wire is positioned in the mouth 10 of the channel 6 and inserted in this orientation into the channel 10 between the blades 4,5. The contact 1 is manufactured so that the distance between the cutting corner 13 and the flat contact surface 5C,5A, i.e. the effective width of the channel 6, is less than the diameter of the conductive core of the wire.

Another way of describing the orientation of the blades 4,5 with respect to one another is to consider a first plane passing through the centre of the blade 4 parallel to its major surfaces 4A,4B and a second plane normal to the centre of the flat contact face 5C,5B - both planes being parallel to the longitudinal axes of the blades 4,5. The first and second planes are preferably at an angle to one another of between 30° and 60° , but most preferably, 45° .

The contact 1 is simple to manufacture, requiring a single stamping step to cut the contact outline, the blades 4,5 apart and to radius the blade 5 into the desired shape. Since the contact 1 is manufactured from a single sheet of material, there is no need to cut a slot of predetermined width from the sheet of material, rather, all that is required to form the two blades 4,5 and the channel 6 therebetween is to shear a portion of the sheet of material in the stamping step into the two blades so that one blade 5 is radiused. In fact, the channel 6 in designs embodying the present invention is in fact displaced from the contact centre line, i.e. the plane of the base 2 and terminal 3, the shaped blade being about 25% wider than the flat blade.

It will be understood that the present invention provides a contact 1 that is effective in operation, and is also cheap and simple to produce.

In present specification "comprises" means "includes or consists of" and "comprising" means "including or consisting of".

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

CLAIMS:

1. A contact for establishing electrical connection with an electrically conductive wire, the contact being manufactured from a planar material and having a base and a pair of elongate blades extending from the base and defining therebetween a channel within which a wire is to be received, a flat contact surface of one blade being opposite a cutting edge of the other blade and lying on opposite sides of the channel, the flat contact surface maintaining the wire substantially parallel to the flat contact surface through the channel.
2. A contact according to Claim 1, wherein one blade is shaped so as to present the flat contact surface to the cutting edge of the other blade.
3. A contact according to Claim 2, wherein the shaped blade prescribes an arc about an axis parallel to the longitudinal axis of the shaped blade.
4. A contact according to any preceding claim, wherein the blades each have two major surfaces and two minor surfaces and the flat contact surface comprises a minor surface of one blade proximate the other blade.
5. A contact according to any one of Claims 1 to 3, wherein the blades each have two major surfaces and two minor surfaces and the flat contact surface comprises a portion of a major surface of one blade proximate the other blade.
6. A contact according to any preceding claim, wherein the blades each have two major surfaces and two minor surfaces and the cutting edge comprises a corner of a major surface with a minor surface of the other blade proximate the one blade.

7. A contact according to Claim 5, wherein the flat contact surface lies in a first plane and the planes of the two surfaces defining the cutting edge lie in a second and a third plane respectively, the second and third planes being respectively between 30° and 60° to the first plane.

8. A contact according to Claim 7, wherein the second and third planes are in the region of 45° to the first plane.

9. A contact for establishing electrical connection with an electrically conductive wire, the contact being manufactured from a planar material and having a base and a pair of elongate blades extending from the base and defining therebetween a channel within which a wire is to be received, a flat contact surface of one blade and a cutting edge of the other blade lying on opposite sides of the channel, wherein a line drawn parallel to the flat contact surface and passing through the point defined by the end of the cutting edge is not parallel to either of the surfaces defining the cutting edge.

10. An insulation displacement connector including a contact according to any preceding claim.

11. A contact substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

1 / 3

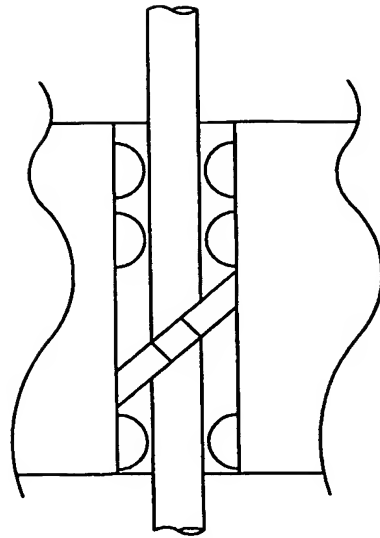


FIG 1
(PRIOR ART)






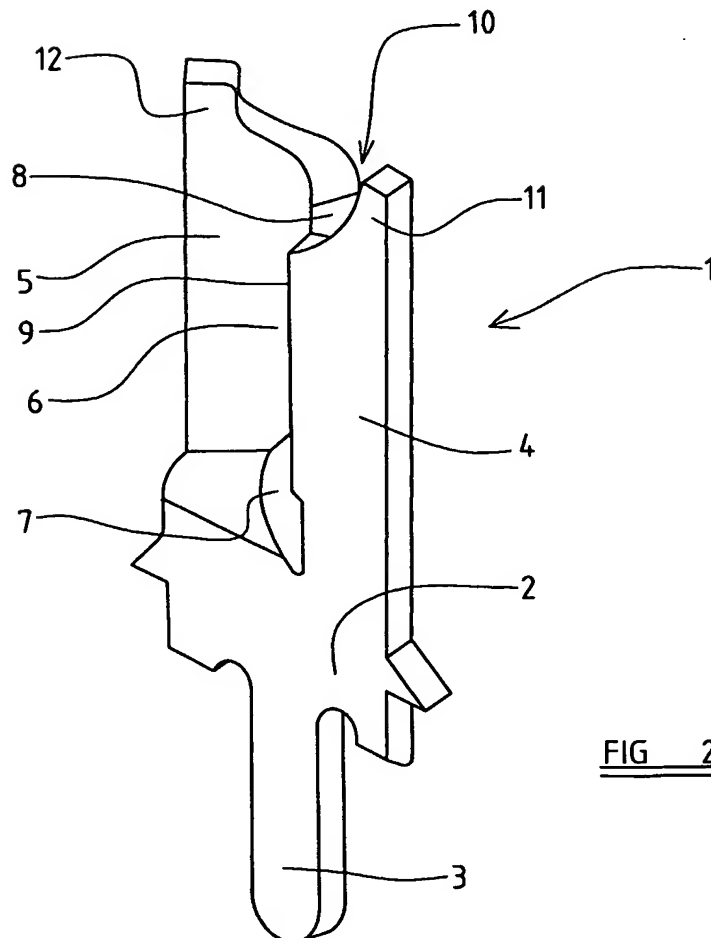


FIG 2

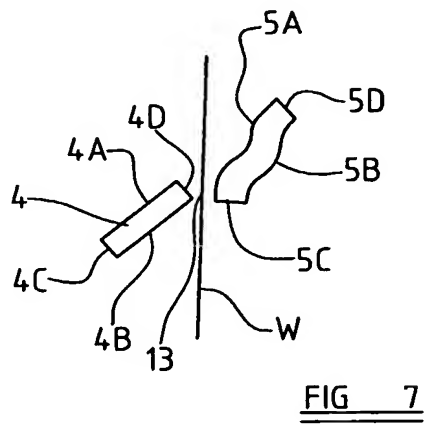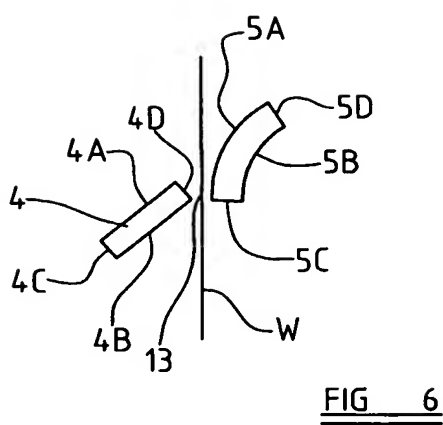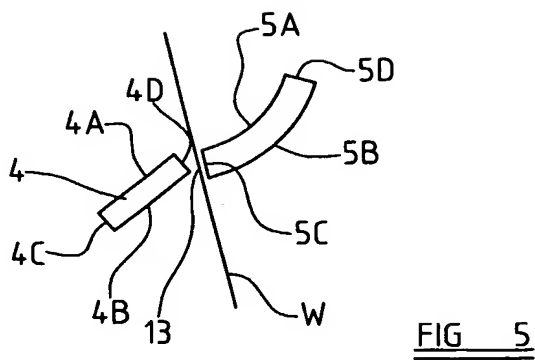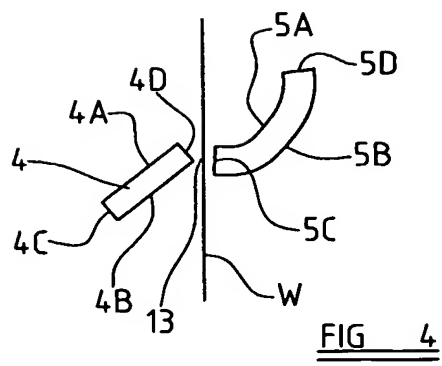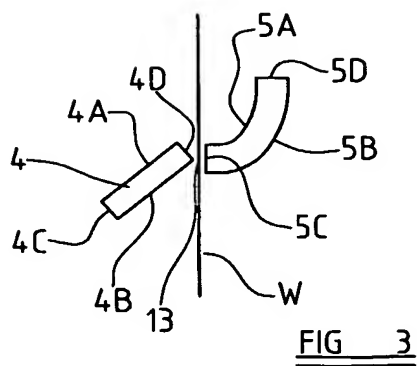

3 / 3

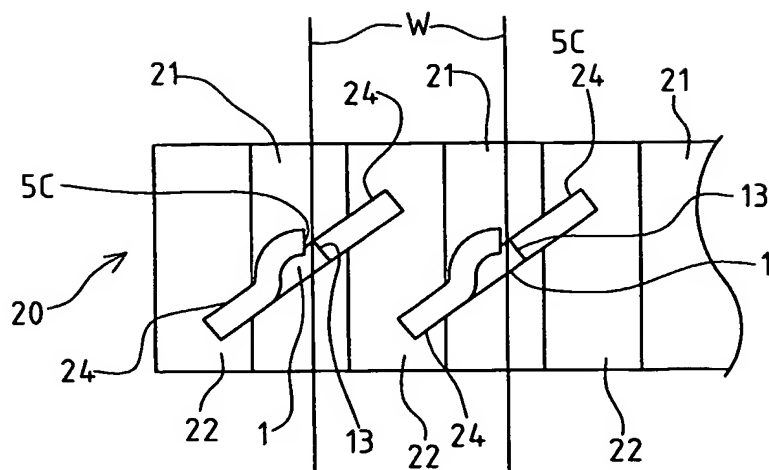


FIG 8

INTERNATIONAL SEARCH REPORT

In ☐ national Application No

PCT/GB 03/00960

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01R4/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 027 361 A (BURMEISTER KLAUS-DIETER ET AL) 22 February 2000 (2000-02-22)	1,2,4,6, 9-11
Y	figure 6	3,8
Y	DE 43 41 152 C (QUANTE AG) 16 March 1995 (1995-03-16) figures 3,4	3
Y	US 5 522 733 A (JONES KEITH H ET AL) 4 June 1996 (1996-06-04) figures 2,3A,3B	8
A	US 4 171 857 A (FORBERG HORST ET AL) 23 October 1979 (1979-10-23) cited in the application the whole document	1-11
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

27 May 2003

Date of mailing of the international search report

04/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Salojärvi, K

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/00960

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 836 782 A (HEBENSTREIT MARTIN ET AL) 17 November 1998 (1998-11-17) the whole document ---	1-11
A	EP 0 525 457 A (KRONE AG) 3 February 1993 (1993-02-03) the whole document -----	1-11

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/00960

Information on patent family members

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6027361	A	22-02-2000	DE 19732182 C1	25-03-1999
			AT 219299 T	15-06-2002
			DE 59804396 D1	18-07-2002
			EP 0893845 A2	27-01-1999
			ES 2178081 T3	16-12-2002
DE 4341152	C	16-03-1995	DE 4341152 C1	16-03-1995
			AT 149745 T	15-03-1997
			DE 59401930 D1	10-04-1997
			EP 0656672 A1	07-06-1995
US 5522733	A	04-06-1996	AT 131317 T	15-12-1995
			AT 163808 T	15-03-1998
			AT 170672 T	15-09-1998
			AU 657535 B2	16-03-1995
			AU 1776992 A	12-01-1993
			AU 672727 B2	10-10-1996
			AU 7901194 A	02-02-1995
			AU 670721 B2	25-07-1996
			AU 7901294 A	02-02-1995
			AU 679270 B2	26-06-1997
			AU 7901394 A	02-02-1995
			CA 2111352 A1	23-12-1992
			DE 69206615 D1	18-01-1996
			DE 69206615 T2	01-08-1996
			DE 69224668 D1	09-04-1998
			DE 69224668 T2	30-07-1998
			DE 69226879 D1	08-10-1998
			DE 69226879 T2	11-03-1999
			DE 588834 T1	28-07-1994
			DK 588834 T3	04-03-1996
			DK 643440 T3	28-09-1998
			DK 643441 T3	31-05-1999
			EP 0588834 A1	30-03-1994
			EP 0643440 A2	15-03-1995
			EP 0643441 A2	15-03-1995
			ES 2082473 T3	16-03-1996
			ES 2113052 T3	16-04-1998
			ES 2123708 T3	16-01-1999
			WO 9222941 A1	23-12-1992
			GB 2271892 A ,B	27-04-1994
			GB 2282279 A ,B	29-03-1995
			GB 2282280 A ,B	29-03-1995
			GR 3019128 T3	31-05-1996
			GR 3026461 T3	30-06-1998
			JP 6507995 T	08-09-1994
			AU 662008 B2	17-08-1995
			AU 2255392 A	11-02-1993
			AU 679386 B2	26-06-1997
			AU 3018295 A	26-10-1995
			AU 686416 B2	05-02-1998
			AU 3018395 A	26-10-1995
			DE 69214289 D1	07-11-1996
			DE 69214289 T2	24-04-1997
			EP 0593584 A1	27-04-1994
			EP 0685905 A2	06-12-1995
			WO 9301634 A2	21-01-1993
			GB 2271677 A ,B	20-04-1994

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/00960

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4171857	A	23-10-1979	DE 2725551 A1	21-12-1978
			AT 370562 B	11-04-1983
			AT 372778 A	15-08-1982
			BE 867675 A1	18-09-1978
			CH 637506 A5	29-07-1983
			DK 251278 A ,B,	08-12-1978
			FR 2394188 A1	05-01-1979
			IT 1101042 B	28-09-1985
			LU 79755 A1	28-11-1978
			NL 7805902 A ,B,	11-12-1978
US 5836782	A	17-11-1998	AU 2932395 A	16-02-1996
			EP 0770273 A1	02-05-1997
			WO 9602957 A1	01-02-1996
EP 0525457	A	03-02-1993	DE 4126068 C1	03-12-1992
			AT 135142 T	15-03-1996
			DE 59205550 D1	11-04-1996
			DK 525457 T3	01-04-1996
			EP 0525457 A2	03-02-1993
			ES 2084885 T3	16-05-1996
			GR 3019244 T3	30-06-1996
			IE 922555 A1	10-02-1993